

## **STARPLAN**

Hydraulic-reversible  
land levelling



**STARPLAN**

# VERSATILE AND EFFICIENT

The hydraulic-reversible land levelling Starplan is perfect for building waterways and land formation in the crop field, according to the farmer's needs. Starplan available models: 5500, conventional or hydraulic.

## Additional weight

It can be equipped with an additional weight of up to **800 kg** for operations that require a higher liming capacity.


## Hitch

It features height adjustment to ease tractor coupling and ensure practical operations in the crop field.

## Blade

The operation width of the blade is **2.7** or **4 metres**, according to the operation angle adjustment


## Vertical turning of the blade

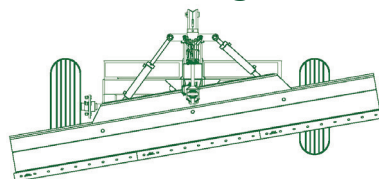

**24°\***

*\*24° for hydraulic Starplan 5000 and 20° for other models.*

## Vertical turning of the blade

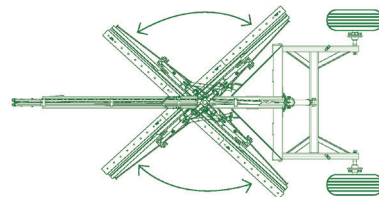

**95°**

## Guide wheels\*

They avoid side sliding when making terraced fields.

*\* Optional feature*

## Website

Access Starplan home page on Stara website for more information.



TECHNICAL SPECIFICATIONS	TECHNICAL SPECIFICATIONS
Starplan 5000 (with a rope)	Starplan 5000 (hydraulic)
Total length	Total length
6.2 m	6.2 m
Outer width of the wheelset	Outer width of the wheelset
2.85 m with tyres	2.85 m with tyres
Outer width of the iron wheelset	Outer width of the iron wheelset
2.45 m	2.45 m
Distance from wheelset - centre to centre	Distance from wheelset - centre to centre
2.44 m	2.44 m
Blade width	Blade width
4.05 m	4.05 m
Height when blade is lifted	Height when blade is lifted
2.7 m	2.35 m
Operation width	Operation width
4 m - 90°	4 m - 90°
Operation width	Operation width
2.7 m - 47.5°	2.7 m - 47.5°
Total weight with tyres	Total weight with tyres
1,460 kg	1,650 kg
Weight of iron wheels	Weight of iron wheels
105 kg	105 kg
Total weight with iron wheels	Total weight with iron wheels
1,425 kg	1,615 kg
Maximum weight	Maximum weight
800 kg	800 kg
Maximum power	Maximum power
90 to 150 cv	90 to 150 cv
Operation speed	Operation speed
2 to 5 km/h	2 to 5 km/h
Wheelset	Wheelset
Standard (fixed) or adjustable	Standard (fixed) or adjustable
Rims	Rims
W12x4 - 5 holes	W12x4 - 5 holes
Tyres	Tyres
14.9" x 24" - 8 plies	14.9" x 24" - 8 plies
Blades	Blades
Reversible	Reversible
Horizontal turning of the blade	Horizontal turning of the blade
95°	95°
Vertical turning of the blade	Vertical turning of the blade
20°	24°
Hydraulic command unit of the tractor	Hydraulic command unit of the tractor
Double / triple	Double / triple
Optional features	Optional features
- Hydraulic kit for tractors with double command unit - Hydraulic kit for tractors with triple command unit	- Hydraulic kit for tractors with double command unit - Hydraulic kit for tractors with triple command unit



THIS SPACE IS INTENDED FOR DEALERSHIP DATA

[www.stara.com.br/en](http://www.stara.com.br/en)

STARA S.A. Agricultural Implements Industry | Av. Stara, 519 - Post office box 53 - Não-Me-Toque/RS - Brazil | Phone/Fax: 55 54 3332 2800 | Postcode: 99470-000 | Email address: faleconosco@stara.com.br

[Linked in /company/Stara](#) - 
 [YouTube /StaraBrasil](#) - 
 [f /StaraBrasil](#) - 
 [@ /StaraBrasil](#) - 
 [stara.brasil](#)

Marketing Department reserves the right to make changes to the product features, specifications and prices without prior notice.

Print: 4 May 2023  
 Update: 18 January 2025