

## Features & Benefits



**TUNED AIR MANIFOLD** – Baffles and splitters in the air system equalise the volume and pressure of air to each row unit. Air pressure sensors monitor and adjust air pressure to desired settings.



**POSITIVE GROUND DRIVE** – Large diameter spring-loaded gauge wheels plus a third center row section ground drive provides a simple, yet positive, 3-section drive.




**LIFT ASSIST** – Reduces the lift requirements on the tractor's 3-point hitch, allowing better weight distribution and stability. Standard on Twin-Row models; optional on single-row models.



### MORE ABOUT THE 12 TO 16 ROW STACK-FOLD PLANTER:

The introduction of the 3P4025AH 12,2 m Stack-Fold Box Planter brings a new level of accuracy and simplicity to the mounted stack-fold planter line. Individual hoppers on each row, positive 3-section ground drive, and the proven accuracy of the Great Plains 25 Series Opener coupled with the Air-Pro® Metering System make this planter a simple, highly productive machine.

With the option of single- or Twin-Row technology, the 3P4025AH stands in a class of its own, bringing all of the ruggedness and accuracy of our Stack fold Planter to the operator who is cost conscious, yet wants to be sure the planter has the ability to precisely space the seed, place the seed at the desired depth, firm it in the seed trench, and close the seed trench to support maximum yields.

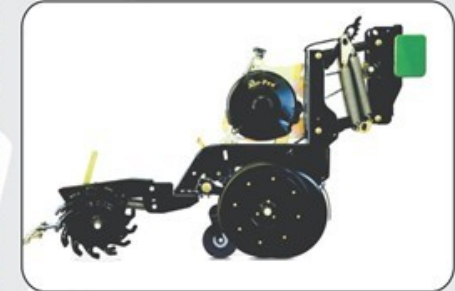

**25 SERIES OPENER** – The 25 series row unit was designed to plant more accurately, last longer, and be easier to maintain than the competition. It is a parallel linkage design, so the row unit is always in the optimal planting position.

Yield-Pro: Stack-fold planter								
MODEL	3P4025AH							
	-1630	-TR3230	-1236	-1238	-1240	-24TR36	-24TR38	-24TR40
WORKING WIDTH	12,2 m	12,2 m	11 m	11,6m	12,2m	11 m	11,6 m	12,2 m
TRANSPORT WIDTH	7,4 m	7,6 m	7,4 m	7,4 m	7,4 m	7,4 m	7,4 m	7,4 m
TRANSPORT HEIGHT	3,9 m							
REQUIRED kW	171 - 194 kW	216 - 246 kW	164 - 186 kW	165 - 186 kW	166 - 186 kW	147 - 224 kW	194 - 224 kW	195 - 224 kW
OPERATING WEIGHT (est)	6 214 kg	8 346 kg	5 670 kg	5 670 kg	5 670 kg	7 303 kg	8 303 kg	9 303 kg
NUMBER OF OPENERS	16	32	12	12	12	24	24	24
ROW SPACING	76 cm	Twin-Row 76cm	91 cm	97 cm	102 cm	Twin-Row 91 cm	Twin-Row 97 cm	Twin-Row 102cm
SEED CAPACITY	56l per row (Twin Row); 106l (Single row configuration)							
LIFT ASSIST TYRES	380/55-16,5							
GAUGE WHEEL TYRE	7.60 x 15 Lug							

Contact us for more information:

086 111 3692 • [info@agriafrika.co.za](mailto:info@agriafrika.co.za) • [www.agriafrika.co.za](http://www.agriafrika.co.za)