


Features & Benefits



Variable intensity tillage: Achieve exceptional soil management, ground levelling, and residue control with adjustable front and rear gangs.

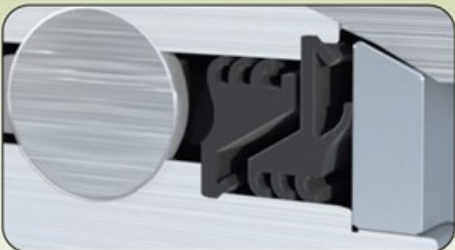

Maintenance-free gang bearings: Unique 7-lip seals enhance durability and simplify maintenance by preventing dirt and debris from collecting between the bearing, housing and spool.



DOUBLE ROLLING BASKET - Achieves a seedbed ready, high-quality finish with adjustable hydraulic down pressure.



MORE ABOUT THE TURBO-SEEDER FOR COVER CROPS:

With high-quality finishing capabilities, the Terra-Max is a hybrid tillage tool that provides exceptional versatility for various field conditions and weather patterns. The Terra-Max can take producers from vertical to conventional tillage and everything between for both fall and spring applications, addressing a wide variety of needs from sizing residue to finishing capabilities. Featured on the Terra-Max is the new TurboSpeed™ blade, which achieves optimum soil penetration and break-out at faster operating speeds for impressive tillage results. The TurboSpeed blade was developed by combining some of the best features from the TurboBlade – used on our highly successful Turbo-Max® – and the SpeedBlade™ featured on our Velocity®. The Terra-Max hybrid tillage tool stands ready to achieve exceptional agronomic results season after season.



The TurboSpeed blade produces unrivaled tillage results by combining the Turbo-wave blade's soil penetration and breakout capabilities with the scalloped profile of the SpeedBlade to drive the blade through the soil.



NEW ROLLING SPIKE LAYOUT - By engineering the rolling spikes to work in a V-pattern, soil and residue are levelled better than ever before.

Terra-Max						
MODELS	HT1100-15	HT1100-20	HT1100-25	HT1100-30	HT1100-35	HT1100-40
COULTER SPACING	190,5 mm					
WEIGHT (approx. max weight w/attachments)	6,050 kg	8,075 kg	10,095 kg	11,965 kg	13,155 kg	16,740 kg
PTO H.P. REQ. (min)	135-175	180-230	230-285	285-340	340-400	380-460
DIMENSIONS						
TILLAGE WIDTH	4,57 m	6,09 m	7,62 m	9,14 m	10,67 m	12,19 m
TRANSPORT WIDTH	4,78 m	4,75 m	4,75 m	4,75 m	5,18 m	5,36 m
TRANSPORT HEIGHT	2,84 m		3,76 m	4,37 m	4,45 m	4,37 m
TILLAGE INFO						
CENTER SECTION	4,57 m	3,37 m		4,04 m		
1ST WING SECTION	N/A	1,60 m	2,36 m	3,15 m	2,79 m	2,82 m
2ND WING SECTION	N/A					
TYRE SIZE (CENTER)	380/55R16.5G		410/50R16.5	480/45R17	445/45R19	
TYRE SIZE (WING)	12.5Lx15 12 PLY					
TYRE SIZE (OUTSIDE WING)	N/A				12.5Lx15 12 PLY	
TYRE SIZE (GAUGE)	9.5Lx15 8 PLY					

Contact us for more information:

086 111 3692 • info@agriafrika.co.za • www.agriafrika.co.za