



Engine	Weichai WP4G95E221
Gross Power	70 kW (94 hp / 95 ps) @ 2,200 rpm
Net Power	68 kW (91 hp / 92 ps) @ 2,200 rpm
Maximum Speed	36 km/h
Standard Loader Bucket Capacity	1.0 m ³
Standard Backhoe Bucket Capacity	0.2 m ³
Operating Weight	8,400 kg

777A BACKHOE LOADER

777A SPECIFICATIONS >>>

ENGINE

Emission Regulation	Tier 2 / Stage II
Make	Weichai
Model	WP4G95E221
Gross Power	70 kW (94 hp / 95 ps) @ 2,200 rpm
Net Power	68 kW (91 hp / 92 ps) @ 2,200 rpm
Peak Torque	383 N · m @ 1,500 rpm
Displacement	4.5 L

ELECTRICAL SYSTEM

System Voltage	12 V
Battery Rating	95 amp - hr

DRIVE TRAIN

Number of Drive Wheels	2WD / 4WD
1st Maximum Speed, fwd/rev	5.9 km/h
2nd Maximum Speed, fwd/rev	10.7 km/h
3rd Maximum Speed, fwd/rev	20.5 km/h
4th Maximum Speed, fwd/rev	36 km/h
Turning Radius Outside of Front Tire with single braking	4,400 mm
Turning Radius Outside of Bucket with single braking	5,554 mm

BRAKES

Service Brake Type	Wet disc
Service Brake Actuation	Hydraulic service

TIRES

Front Tire Size	14-17.5NHS-14RP T
Rear Tire Size	19.5-24NHS -14PR T

HYDRAULIC SYSTEM

Circuit Type	Open
Total Flow	143 L/min
Main Relief Pressure	24 MPa
Pump Type	Tandem gear pump
Steering Type	Priority valve

OPERATING WEIGHTS

Operating Weight	8,400 kg
------------------	----------

LOADER PERFORMANCE

Standard Bucket Type (referenced)	General purpose
Heaped Capacity ISO (referenced)	1.0 m ³
Standard Bucket Width (referenced)	2,260 mm
Lift Capacity at Full Height	30.2 kN
Bucket Breakout Force	59.3 kN
Maximum Dump Angle at Full Height	45°
Dump Height at Maximum Angle	2,691 mm
Dump Reach at Full Height Discharge	713 mm
Boom Lift Capacity, end, at ground	49.3 kN
Maximum Dig Depth	89 mm

BACKHOE PERFORMANCE

Standard Bucket Type (referenced)	General Purpose
Heaped Capacity ISO (referenced)	0.2 m ³
Standard Bucket Width (referenced)	610 mm
Maximum Dig Depth	4,440 mm
Reach From Swing Pivot at Ground	5,443 mm
Turning Angle of Bucket	186°
Bucket Digging Force	58.2 kN
Dipper Digging Force, standard stick	37.5 kN
Loading Height	3,586 mm
Loading Reach from Swing Pivot	3,007 mm

SERVICE CAPACITIES



Fuel Tank	130 L
Engine Oil	13 L
Cooling System	15 L
Hydraulic Reservoir	130 L
Hydraulic System Total	170 L
Transmission and Torque Converter	16 L
Axle, front	6.9 L
Axle, rear	16 L

STANDARD EQUIPMENT

Weichai WP4G95E221 Engine
Carraro Transmission
Auxiliary Hydraulic Kit
Carraro 4 x 4 Axles
Boom Interlock
General Bucket 1.0m³
Seat Belt
Enclosed Cab, ROPS / FOPS, with AC

OPTIONAL EQUIPMENT

Rotary Beacon
Hydraulic Shear
Vibratory Tamper
Hydraulic Hammer
Telescopic Boom

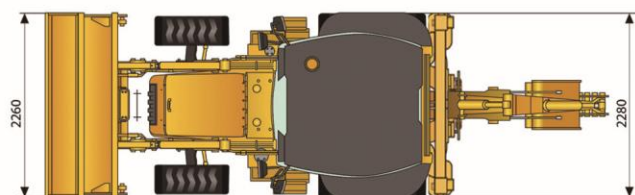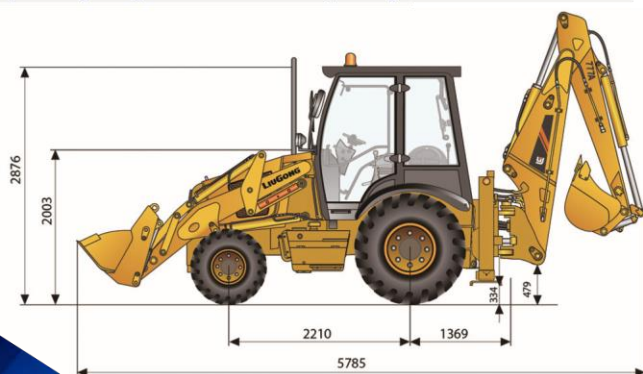

Unit:mm

Contact us:

011-306-0700

elb@elbquip.co.za

www.elbequipment.co.za

04/2020 Designed by LiuGong
Replace the previous versions of 06/2019

Specifications and designs are subject to change without notice. Machines shown may include optional equipment. LiuGong standard and optional equipment may vary from region to region. Please consult your LiuGong dealer for information specific to your area. Engine power kW is converted to horsepower (1 kW=1.3596 ps and 1 kW=1.3410 hp) in this file.