


Pneumatic impact screwdriver DSS 1 inch L

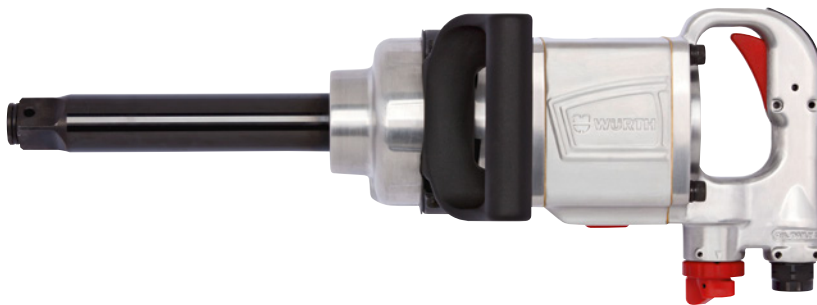

Highly robust, powerful impact screwdriver with long square drive.

Very durable

Robust aluminium housing

Very handy and user-friendly

Ergonomically designed handle, additional handle rotates 360°, user-friendly right/left changeover and adjustable trigger.

Low air consumption, despite maximum performance values and long service life

High-quality double hammer impact mechanism

3-year Würth power tool guarantee on wear and tear damages.

The guarantee is subject to the current terms and conditions, which must be followed.

3 Years Warranty on manufacturing and material defects

Excluded are damages caused by improper use, overloading or failure to observe the operating instructions.

Art. no. 0703 780 0

P. Qty.: 1

Individually boxed

Type description	DSS 1 inch L
Tool holding device	1-inch external square
Max. working torque	1870 Nm
Max. releasing torque	2440 Nm
Sound-pressure level	95 dB
Vibration	9.26 m/s ²
Operating pressure	6.3 bar
Weight of machine	10.93 kg
Min. hose inner diameter	11 mm
Air consumption	370 l/min
Connection thread	1/2 inch
Length x width x height	512 x 109 x 188 mm

Level	Tightening torques Nm (approx. values)	Releasing torque Nm
1	996	Max. 2,440
2	1,355	
3	1,518	
4	1,870	

Notice

- Impact screwdrivers are not torque screwdrivers. Connections requiring a specific torque must be checked by means of a torque measuring device after tightening with the impact screwdriver.
- The operating torque is the torque usually achieved under average working conditions. It is dependent on the highly varying ambient conditions (air pressure, hose diameter, soiling etc.).
- When used regularly, the machine should be lightly oiled via the pneumatic air supply every day. The use of a mist lubricator is recommended
- Plug-in nipple not included in scope of delivery

Related products	Art. no.
Plug-in nipple Series 2000	0699 100 612
1-inch impact socket wrench insert hexagon, metric, short 24 mm	0714 15 01
1-inch impact socket wrench insert hexagon, metric, short 27 mm	0714 15 02
1-inch impact socket wrench insert hexagon, metric, short 30 mm	0714 15 03
1-inch impact socket wrench insert hexagon, metric, short 32 mm	0714 15 04
1-inch impact socket wrench insert hexagon, metric, short 34 mm	0714 15 041
1-inch impact socket wrench insert hexagon, metric, short 36 mm	0714 15 05
1-inch impact socket wrench insert hexagon, metric, short 33 mm	0714 15 33
1-inch impact socket wrench insert hexagon, metric, short 38 mm	0714 15 38
1-inch impact socket wrench insert hexagon, metric, short 41 mm	0714 15 41
1-inch impact socket wrench insert hexagon, metric, short 42 mm	0714 15 42
1-inch impact socket wrench insert hexagon, metric, short 46 mm	0714 15 46
1-inch impact socket wrench insert hexagon, metric, short 50 mm	0714 15 50
1-inch impact socket wrench insert hexagon, metric, short 55 mm	0714 15 55
1-inch impact socket wrench insert hexagon, metric, short 60 mm	0714 15 60
1-inch impact socket wrench insert hexagon, metric, short 65 mm	0714 15 65
1-inch impact socket wrench insert hexagon, metric, short 70 mm	0714 15 70
Special oil For pneumatic tools 1 l	0893 050 5