

Features & Benefits




SHANK - Shank spacing around tyres and throughout the machine with no shanks closer than 71 cm on the entire implement.



LOW-PROFILE FLOATING HITCH - New low-profile hitch with heavy duty ball joint attachment and convenient hose storage area.



FOLDING SYSTEM - Folding system with heavy hinges on both inside and outside wings.

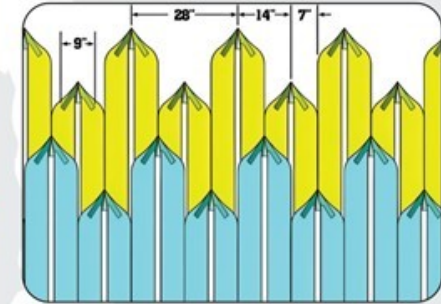

MAX-MIX - TheMax-Mix shank pattern increases chemical incorporation, reduces windrowing, and helps eliminate banding.

MORE ABOUT THE FIELD CULTIVATOR:

The 8000 Series Field Cultivator offers the clever way to prepare perfectly firm, uniform, smooth seedbeds. Shank spacing throughout the machine, especially around tyres, has been improved, ensuring no shanks are closer than 71 cm. The hinges and fold system have also been "beefed up", making folding and unfolding smoother and more reliable. The floating hitch ensures that the tines work at a constant depth and do not dig in even in uneven terrain.

SPECIFICATIONS										
MODEL INFO FIELD CULTIVATOR: SHALLOW TILLAGE										
MODELS	8323FC	8328FC	8332FC	8336FC	8539FC	8544FC	8548FC	8551FC	8556FC	8560FC
NUMBER OF SWEEPS	39	47	55	61	67	75	83	87	95	103
TYRES	9,5L x 15 8-ply (4)		11L x 15 12-ply (4)		11L x 15 F-ply (4)			12,5L x 15 F-ply		
PTO KW REQUIRED	90 - 131	112 - 149	131 - 164	149 - 187	149 - 205	168 - 224	187 - 243	205 - 261	224 - 280	243 - 299
DIMENSIONS										
TILLAGE WIDTH	7 m	8,5 m	9,9 m	11 m	12 m	13,4 m	14,9 m	15,5 m	17 m	18,4 m
TRANSPORT WIDTH	4,3 m	4,3 m	4,3 m	4,9 m	4,5 m	4,5 m	4,5 m	5,1 m	5,1 m	5,1 m
TRANSPORT HEIGHT	3 m	3,8 m	4,5 m	4,6 m	3,6 m	4,3 m	4,3 m	4,3 m	5 m	5 m
TILLAGE INFO										
CENTRE SECTION	3 m	3 m	3 m	3,65 m	3 m	3 m	3 m	3,65 m	3,65 m	3,65 m
1ST WING SECTION	2 m	2,7 m	3,4 m	3,4 m	2,44 m	3,2 m	3,2 m	3,2 m	3,9 m	3,9 m
2ND WING SECTION	N/A	N/A	N/A	N/A	2 m	2 m	2,75 m	2,75 m	2,75 m	3,35 m

Contact us for more information:

086 111 3692 • info@agriafrika.co.za • www.agriafrika.co.za